



Datenblatt - Fiche technique - Data sheet

**21.15.8701**



ROLINE LWL-Kabel 50/125 $\mu$ m OM3, LC/LC, türkis, 1m

ROLINE Câble FO 50/125 $\mu$ m, LC/LC, OM3, turquoise, 1m

ROLINE Fibre Optic Jumper Cable, 50/125 $\mu$ m, LC/LC, OM3, turquoise, 1 m

1 2 3 4 5 6

A

A


B

B

C

C

D

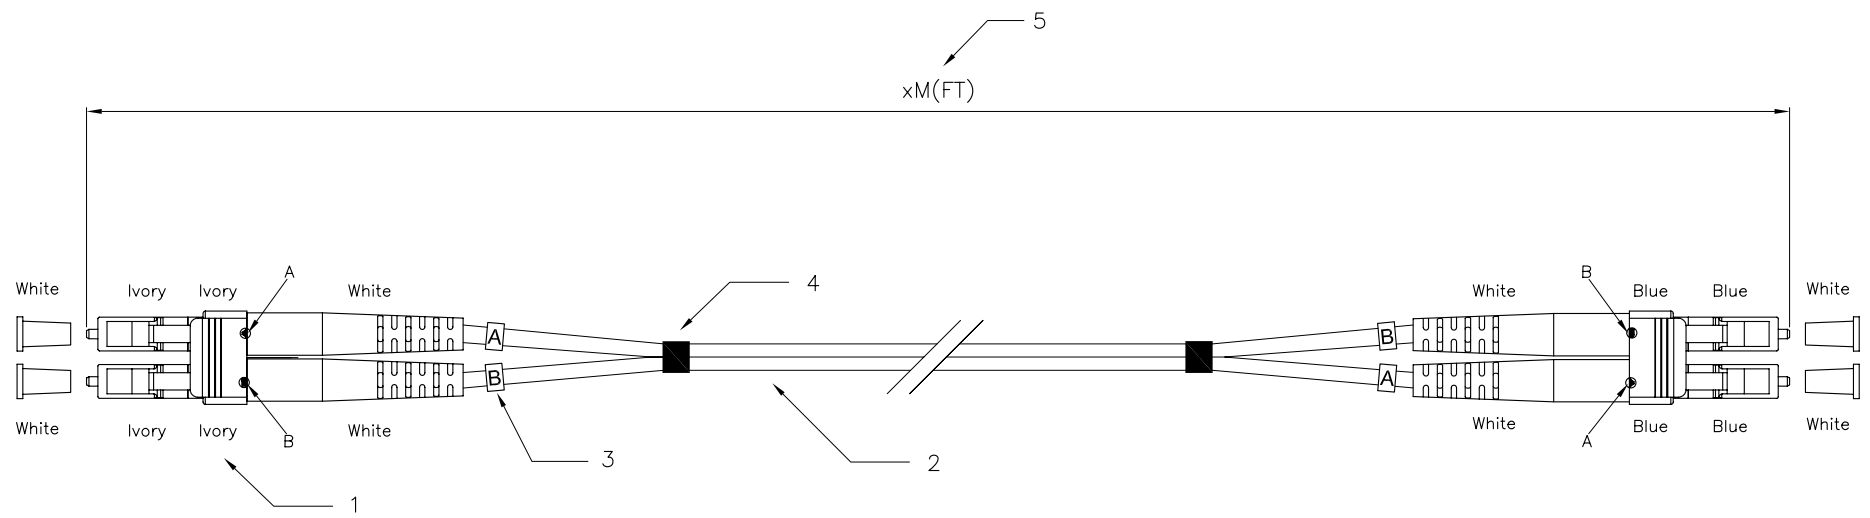

Specification:

- 1. Connector Type : LC Multimode
- 2. Cable Type :  
 2-1 Zipcord Cable,  $\phi 2.0\text{mm}$ , 50/125um Multimode.(OM3 Corning Fiber)  
 2-2 Calbe Jacket : Aqua Color, PVC Material.
- 3. Cable Marker
- 4. Shrink Tube
- 5. Length : xM(FT)

Performance:

- a. Insertion Loss :  $< 0.5 \text{ dB}$
- b. Fiber Extention :  $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c.  $\phi 1.25\text{mm}$  Ferrule End-face Radius :  $7 < R < 25\text{mm}$
- d. Apex Offset :  $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating :  $0.2 \text{ dB Max}$
- f. Operating Temperature :  $-20^\circ$  to  $+70^\circ$
- g. Storage Temperature :  $-40^\circ$  to  $+80^\circ$

Remack#

21.15.8700	MultiMode, LC-LC,50/125 um	0.5M
21.15.8701	MultiMode, LC-LC,50/125 um	1M
21.15.8702	MultiMode, LC-LC,50/125 um	2M
21.15.8703	MultiMode, LC-LC,50/125 um	3M
21.15.8705	MultiMode, LC-LC,50/125 um	5M
21.15.8708	MultiMode, LC-LC,50/125 um	10M

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	07.JAN.2011	Abby	<b>Rotronic Co.,Ltd.</b>
	CHECK	07.JAN.2011	MAER	
	APPROVAL	07.JAN.2011	YTY	
	DATE		NAME	ITEM NO.: 21.15.XXXX 有吊卡
SCALE	1/1 (A4)	UNIT	mm	DES.: LC to LC Duplex patch cord
DRAWING NO.		SFNIE503131xxxx03001(SA1)		
DRAWING CLASSIFICATION		S	SHEET 1 OF 1	

1 2 3 4 5 6

10cm